



Aquadis+

A New Standard for Volumetric Water Meters

Aquadis+ is a world-class piston type volumetric water meter, designed for the best metering and billing in residential applications.

FEATURES AND BENEFITS

- » Long-term performance
 - Long-lasting high accuracy
 - High Efficiency
 - Any installation position
 - Permanent Readability
- » New Design Features
 - Enhanced Robustness
 - Pre-equipped for Communication
 - Compact
 - Easy Handling

Efficiency

Focusing on reliable and long-term performance, Aquadis+ offers maximised revenue collection provided by an innovative design to maintain high efficiency over time.

The Technology

The working principle of Aquadis+ is based on the combination of an extra dry register (no gears in the water), associated with a hermetical measuring element, using the concept of magnetic transmission.

Communication Device

Pre-equipped for future communication through Cyble.

Approvals and Standards

Aquadis+ is approved at Q3 1,6, 2,5 and 4m³/h from Ratio 50 to 400 according with:

- » MID, Directive 2004/22/EC of the European Parliament
- » European Standard EN14154 - 2005 - International Standard ISO 4064
- » Recommendations OIML R49

Aquadis+ is also approved class C and D from Qn 0.75 to 1.5 according with:

- » European Directive EEC 75/33 for cold potable water meters
- » British Standard BS 5728

Aquadis+ is compliant with regulations for products to use in contact with water intended for human consumption. Aquadis+ has approvals granted by the following laboratories:

- » ACS (France)
- » Belgaqua (Belgium)
- » Kiwa (Netherlands)
- » WRAS (United Kingdom)

Hermetically Sealed Register* (Counter)

Glass lens and copper can register, condensation and water proof (IP 68), allows permanent readability

* option for plastic case, for specific applications



Communication

Pre-equipped with the proven Cyble target allowing the meter's integration into remote reading systems by adding the relevant module




Robust Case (available also in thermoplastic material)

High resistance to pressure

Effective and Easy Maintenance Filter

Prepared to contain major particles, easy to clean


Compact and Easy Handling

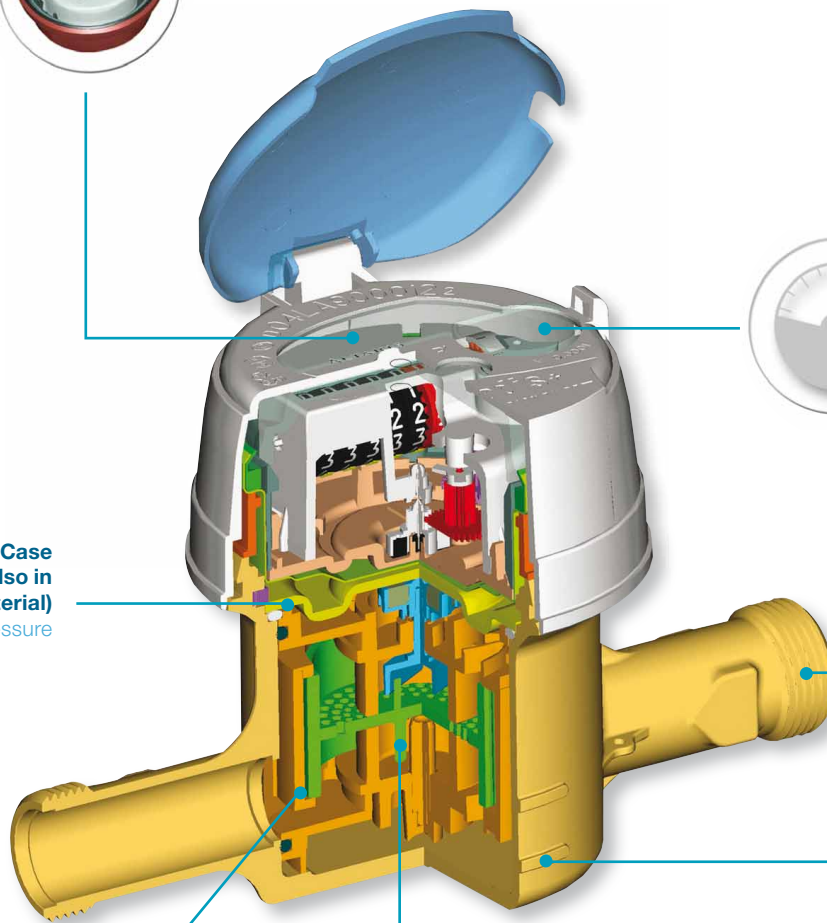

Aquadis+ DN15

Outstanding Accuracy and Long Term Performance

Hydro-dynamically balanced piston obtained by an innovative design of measuring elements enables not only detection and account of extremely low flows (typically, < 1L/h) in wide range of flow rates, but also long-lasting and stable accuracy.



OPTION

Aquadis+ meters may be fitted with:

- » Cyble modules from the factory (please refer to specific leaflet),
- » Non return-valve for outlet pipe,
- » Removable cap.

COMMUNICATION

Aquadis+ is always pre-equipped with the proven Cyble technology, making it possible to mount plug-and-play Cyble modules at any time. This opens up to a large range of advanced and reliable AMR systems:


- » Radio walk-by systems
- » Radio fixed data collection systems
- » M-Bus wired systems (walk-by or fixed network)
- » or any other system based on universal pulse outputs

Key Advantages of Cyble Technology


- » Itron standard meter interface
- » No need of additional investments on the water meter
- » Electronic detection principle (no wear or bounce)
- » Leak detection
- » Reverse flow detection
- » Fraud detection
- » Not sensitive to magnetic fields
- » Perfect index correlation

For further info, refer to the specific leaflet.

HEAD LOSS

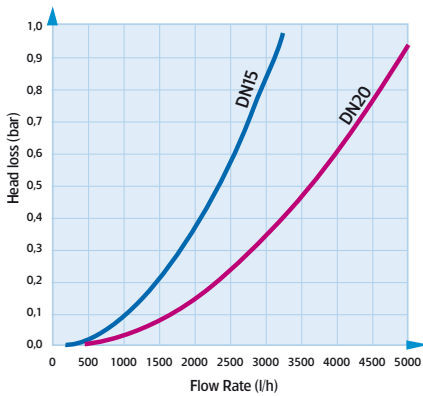

TYPICAL ACCURACY CURVE ACCORDING WITH R160 MID CHANNEL

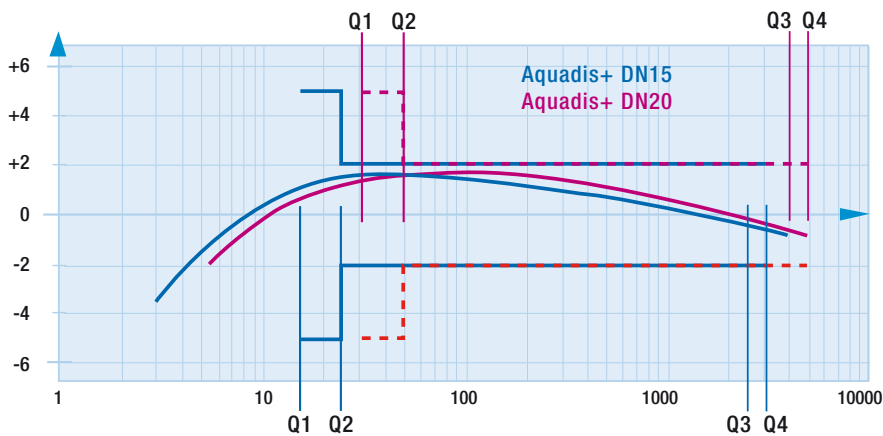

The dynamic range is defined as the Ratio (R) between the Nominal and the minimum flowrates. The MID approval proves the Aquadis+ real capacity to withstands to higher nominal flows ($Q3 > Qn$).



Cyble RF fitted on Aquadis+ DN15 meter



Aquadis+ DN20



Aquadis+ Manifold version



Aquadis+ DN15 composite version:
 - robust
 - lighter and ergonomic
 - resistant to dezincification

Technical Specifications

| Meter Capacity | mm | | 15 | | 20 | |
|----------------|--------|--|------|------|------|--|
| | inches | | 1/2" | 3/4" | 3/4" | |

In compliance with MID

| | | | | | | |
|--|---------|-------------------|-----------|-------|-----------|------|
| MID Accuracy Ratio (Q3/Q1) - all positions | | | 50 / 400 | | 63 / 400 | |
| MID Type Approval Number | | | LNE 13636 | | LNE 16467 | |
| Nominal Flow Rate | (Q3) | m ³ /h | 1.6 | 2.5 | 2.5 | 4.0 |
| Standard Ratio (*) | (Q3/Q1) | | 100 | 160 | 100 | 160 |
| Minimum Flow Rate | (Q1) | l/h | 16 | 15.6 | 25 | 25 |
| Transitional Flow Rate | (Q2) | l/h | 25.6 | 25 | 40 | 40 |
| Overload Flow Rate | (Q4) | m ³ /h | 2 | 3.125 | 3.1 | 5 |
| Pressure Loss Class at Q3 | | bar | 0.25 | 0.63 | 0.25 | 0.63 |
| Maximum Admissible Pressure (MAP) | | bar | 16 | | 16 | |
| Operating Temperature (T) | | °C | 0.1 / 30 | | 0.1 / 50 | |
| Climatic Environment | | °C | 5 / 55 | | 70 / -10 | |

(*) Other Ratios available under specific request

Other Characteristics

| | | | |
|--------------------------------------|----------------|--------------|--------------|
| Indication Range | m ³ | 99999,999 | 99999,999 |
| Minimum Scale Interval | l | 0.02 | 0.02 |
| Typical Starting Flow Rate | l/h | 1 | 2 |
| Accuracy +/- 5% | l/h | 3 | 5 |
| Accuracy +/- 2% | l/h | 5 | 8 |
| Testing Pressure | bar | 25 | 25 |
| Maximum Accidental Water Temperature | °C | 50 (<1h/day) | 60 (<1h/day) |

In compliance with EEC 75/33

| | | | | | | | |
|-----------------------------------|----------------------|-------------------|-------|----|------|-----------|---|
| EEC Metrology Class | Class C all position | | | | - | | |
| EEC approval number | F-04-G-297 | | | | - | | |
| Nominal Flow Rate | (Qn) | m ³ /h | 0.75 | 1 | 1.5 | 0.75/1,5* | - |
| Maximum Flow Rate | (Qmax) | m ³ /h | 1.5 | 2 | 3 | 3 | - |
| Minimum Flow Rate | (Qmin) | l/h | 7.5 | 10 | 15 | 7.5 | - |
| Transitional Flow Rate | (Qt) | l/h | 11.25 | 15 | 22.5 | 11.25 | - |
| Maximum Admissible Pressure (PN) | | bar | 16 | | | | - |
| Pressure Loss (Head Loss Group) | | bar | 1 | | | | - |
| Maximum Operating Temperature (T) | | °C | 30 | | | | - |



In compliance with British Standard 5728

| | | | | | |
|------------------------|----------------------|------|-----|---|---|
| BS Metrology Class | Class D all position | | | | - |
| Nominal Flow Rate | m ³ /h | 1 | 1.5 | - | |
| Maximum Flow Rate | m ³ /h | 2 | 3 | - | |
| Minimum Flow Rate | l/h | 7.5 | - | - | |
| Transitional Flow Rate | l/h | 11.5 | - | - | |


Dimensions

| | | | |
|------------------|--------|--------------------------|---------|
| Nominal Diameter | mm | 15 | 20 |
| Meter Thread | inches | G 3/4" | G 1" |
| | mm | 20 x 27 | 26 x 34 |
| A | mm | 105/110/115* 130/165/190 | |
| B | mm | 115 | 143 |
| C | mm | 22 | 20 |
| D | mm | 85 | 88 |
| E | mm | 68 | 70 |
| F | mm | 158 | 186 |

(*) Other available lengths: 134, 165, 170

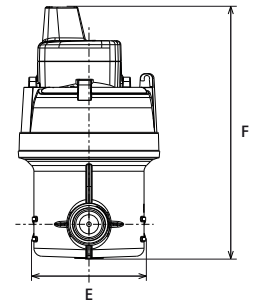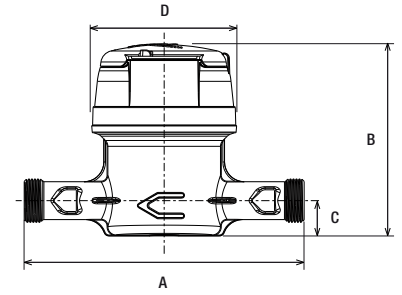

In line version

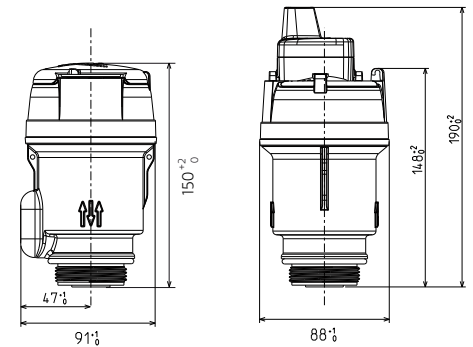

Manifold version

Weight

| Dimension | mm | 15 | 20 |
|----------------|----|-----------|-----|
| Weight in line | Kg | 0.75/0.95 | 1.5 |
| Weight coaxial | Kg | 1.12 | - |